




62.2HP Tractor with 2WD/4WD Drive

Our 2WD/4WD Drive Tractors are built safe, steady and sturdy for on and off road tough Africa conditions, are uncomplicated to use and offer the best safety features as standard. Toma Equipment supports all its tractors with qualified support personnel and extensive spare parts availability.

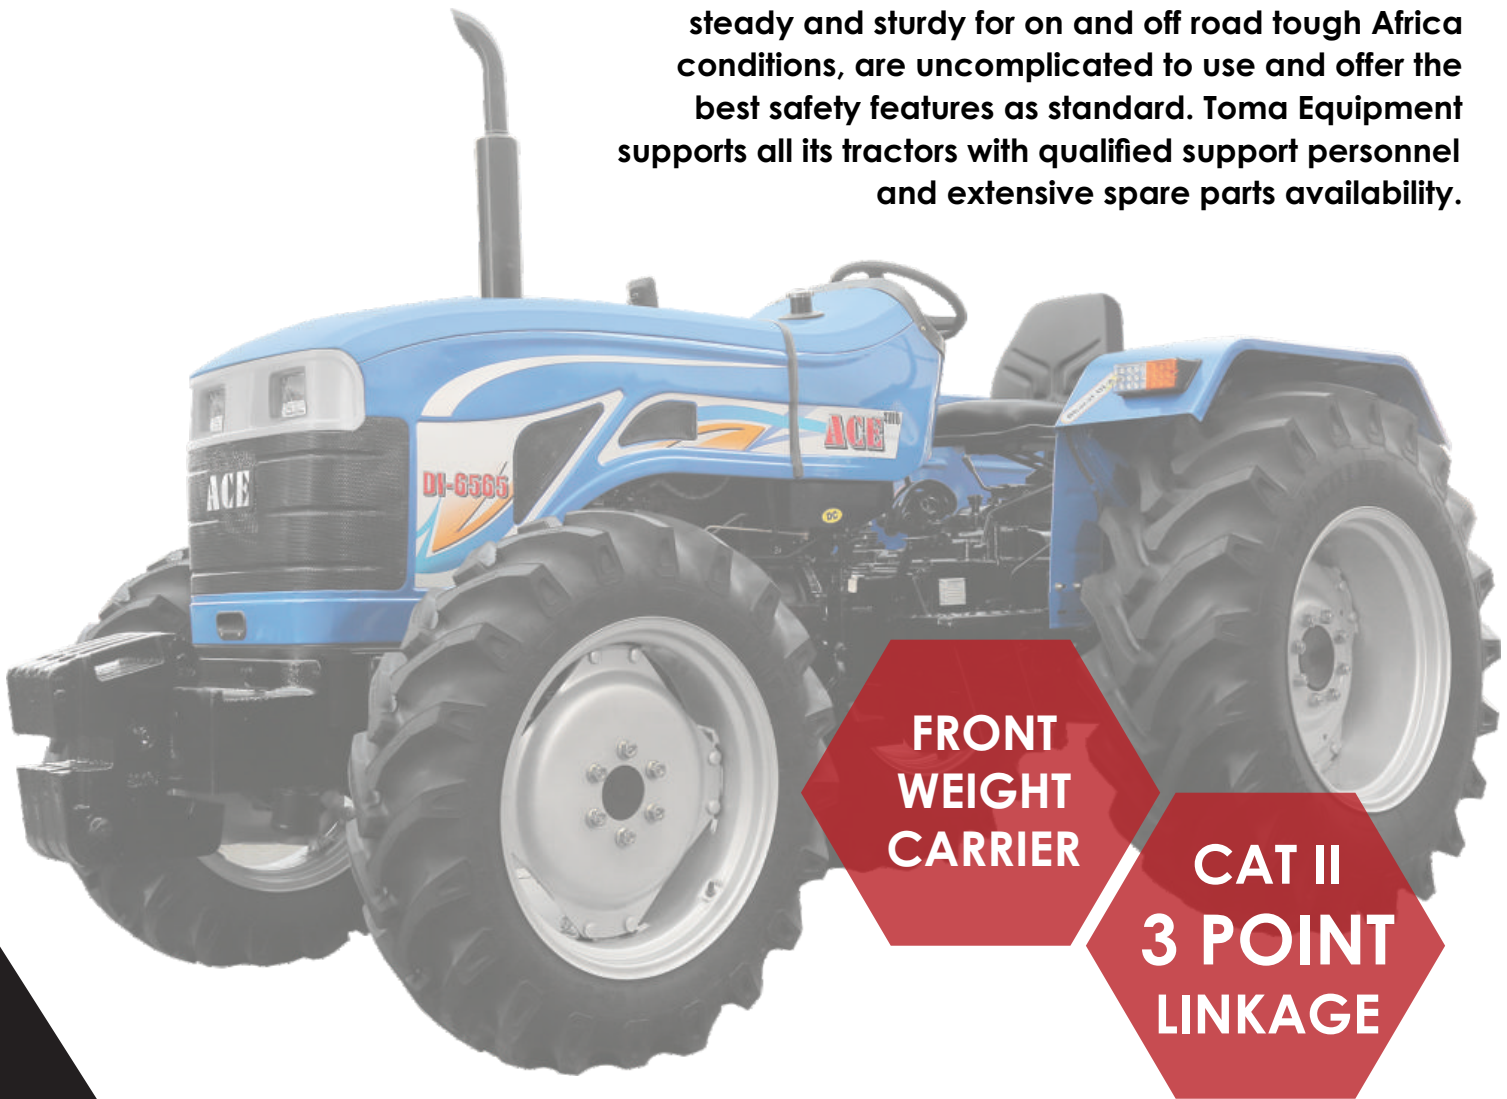

FRONT
WEIGHT
CARRIER

CAT II
3 POINT
LINKAGE

SAFE | STRONG | STURDY

DI 6565


www.toma.co.za



Weight

Front Weight carrier
(front weight optional)

Rear Weight Optional



Brakes


Oil Immersed Brake, Mechanically actuated with Pawl and Ratchet Type Hand Brake



Dimension & Weight


2W/D 2280Kg in Weight, 2130mm Wheel Base, 3845mm in total length, 1940mm in total width, 2340mm in Height, 465mm Ground Clearance. Between 1395mm - 1505mm Front Track and between 1390mm - 2060mm Rear Track.

4W/D 2545Kg in Weight, 2390mm Wheel Base, 4210mm in total length, 1980mm in total width, 2420mm in Height, 400mm Ground Clearance. Between 1460mm Front Track and between 1565mm Rear Track.



Steering

Power Steering



Electrical System

12,88V,Ah Battery
12,42V,A Alternator
Seven Pin (Round) Trailer Socket



Capacity


65l Fuel Tank, 2.75l Power Steering System, 12l Engine Oil, 55l Hydraulic & Transmission



Speed Forward


Max: 35.10Km/h@2200RPM

Min: 2.90Km/h@2200RPM



Engine

A65 (Cold Start Kit Optional) 61.2/45HP/kW, Four Cylinder, naturally aspirated, 108/118mm Bore/Stroke, 4088cc, 2200RPM, Dry Air Cleaner with Clogging Sensor, 255Nm@1450RPM




PTO

Independent PTO@540RPM
Mechanically actuated and Hand Operated



Transmission

2W/D or 4W/D with dual clutch and 8F+2R Gearbox. Sliding Mesh Type



Turning Diameter

2W/D
With Brakes (m) 7.24 (L) -7.5 (R)
Without Brakes (m) 8.0 (L) -8.24 (R)

4W/D
With Brakes (m) 9.33 (L) -9.53 (R)
Without Brakes (m) 10.13 (L) -10.30 (R)



Hydraulic System

Automatic Draft Control, CAT II 3 Point Linkage, One Spool Valve, 1SA +1DA Auxiliary Hydraulic Circuit, 1800Kg Hydraulic Lifting Capacity at ball ends



Other

Optional (Rotating Type) Trailer Hitch
Horizontally Adjustable Driver Seat with SMV Emblem
Fuel Indicator Gauge and Front Tow Hook
DCV



Tyres

2W/D	4W/D
Front 7.50 x16	Front 9.50 x 24
Rear 16.9 x 28	Rear 16.9 x 28

SPECIFICATIONS DI 6565